



THE ORIGINAL SINCE 1967.

**CRUBABU**®

LIVE TO PLAY LIVE®



JIMDUNLOP.COM

92503000500revF

# 95Q CRY BABY® WAH WAH

## POWER

The 95Q Cry Baby® Wah Wah is powered by one 9-volt battery (accessed via the bottom of the pedal), an AC adapter such as the Dunlop ECB003/ ECB003E, or a DC Brick™ power supply.


## CONTROLS

- VOLUME knob controls amount of gain added by BOOST switch, up to 15dB
- VARIABLE Q knob adjusts frequency range of wah wah effect
- BOOST switch increases output as set by the VOLUME knob
- Silent "auto-off" switching puts pedal into bypass mode when you take your foot off

## SETUP INSTRUCTIONS

- Run an instrument cable from your guitar to the 95Q's Instrument jack and another instrument cable from the 95Q's Amplifier jack into your amplifier's input.
- The 95Q is bypassed (turned off) whenever your foot is off the pedal. To turn it on, simply press the toe of the pedal down with your foot.
- Set both the VOLUME control and the VARIABLE Q control fully counterclockwise.
- Rotate the VARIABLE Q knob clockwise for a narrower frequency range to emphasize higher end harmonics or counterclockwise for a wider frequency range that emphasizes lower end harmonics.

- To increase the 95Q's output, engage the BOOST switch and rotate the VOLUME control clockwise to increase the amount of gain, up to 15dB, or counterclockwise to decrease it.
- Rock your foot back and forth on the pedal to hear the vocal, expressive tones that the Cry Baby is famous for.

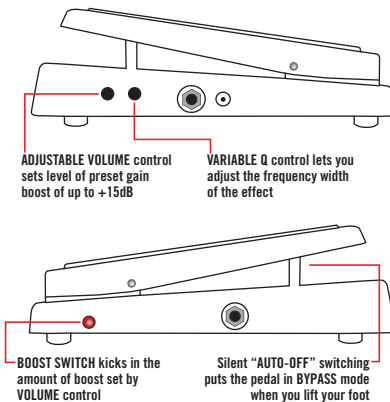

## SPECIFICATIONS

### Impedance

Input	1 MΩ
Output	1 kΩ

### Noise Floor\*

Heel Down	-98 dBV
Toe Down	-90 dBV

### Bypass Filter

Center Frequency	390 Hz to 2 kHz
Maximum Gain	17 dB

Boost Range	0.1 dB to 15 dB
-------------	-----------------

Bypass	Buffered
--------	----------

Current Draw	1.8 mA
--------------	--------

Power Supply	9 volts DC
--------------	------------

\*A-weighted



DUNLOP MANUFACTURING, INC.  
P.O. BOX 846 BENICIA, CA 94510 U.S.A.  
TEL: 1-707-745-2722 FAX: 1-707-745-2658